

NOTES

All dimensions in millimetres.

Fencing to be BS 1722 Part 2
2006 Type SW 120, unless as
otherwise stated below.

Post Dimensions (mm)

Strainer	2475 x 175 dia
Intermediate strainer	2475 x 150 dia
Intermediate post	1825 x 90 x 90
Strut	2200 x 100 x 100

Strut to be affixed to strainer post
by means of 2 No 125mm x 5mm
galvanised round steel wire nails.

Earth surrounding strainers, struts
and posts to be well rammed.

Ratchet winders, galvanised, complying
with BS 1722 Part 2:2006 to be provided
on all wires adjacent to strainers.

6 No line wires to be 5mm dia
galvanised and affixed to intermediate
posts by 1 No 40mm x 4mm dia.
galvanised staple per wire.


Line wires and mesh to be fixed
on the highway side of the fence
unless otherwise stated.

Barbed wire to be galvanised twin ply
2.5mm dia. mild steel in accordance with
BS.EN.10223-1:1998 and number of strands
to be as stated in the bill of
Quantities:


- if 1 No set wire 75mm from top
of post on field side.
- if 2 No set first wire as above
and second wire 550mm from
top of post on field side.

Strainers to be at 150m centres
and at all changes of line and level.
Intermediate strainers shall be
positioned on the inside angle
of the mesh and lightly stapled.

All line wires to be zinc coated
to comply with BS EN 10244-2

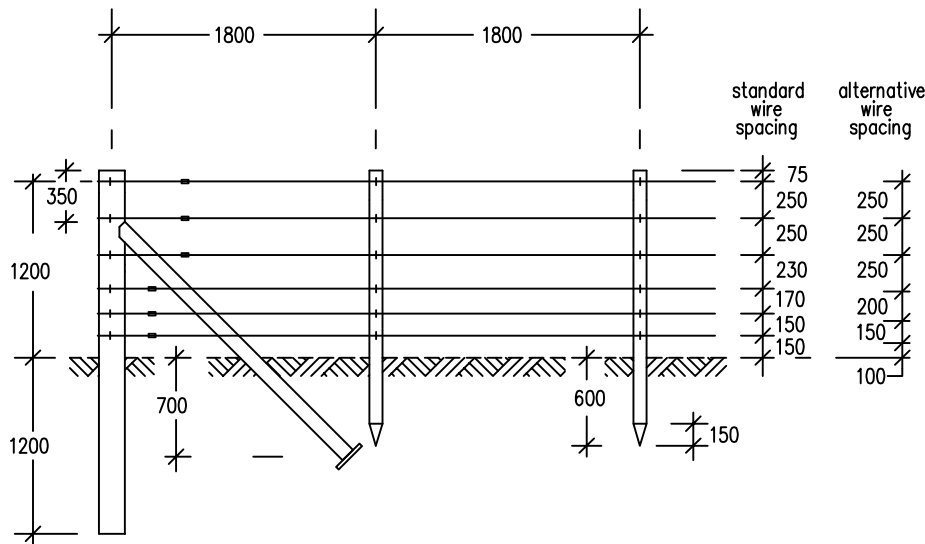

ELEVATION



PLAN