


NOTES

All dimensions in millimetres

Tack coat, other than that specified may be required at the discretion of the engineer.

Tack coat to be in accordance with BS.594987:2007. Rate of spread over existing surfaces to be 0.15-0.25kg/m².

Layers less than 1½ x max. stone size should be included in the layer above or the existing surface planed to give a minimum depth layer.

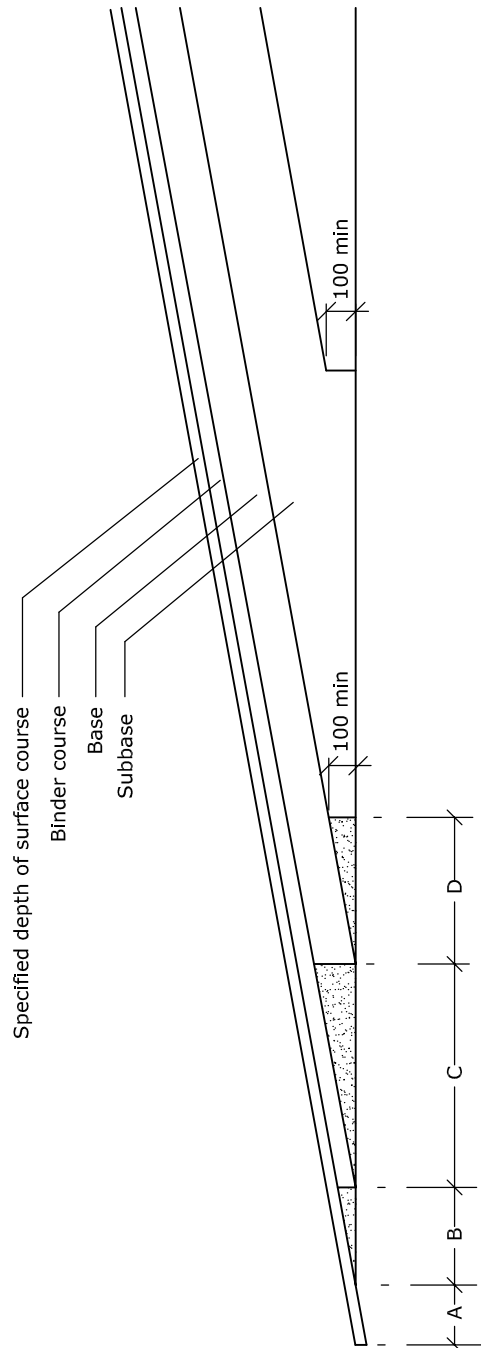

ZONE	CARRIAGEWAY TREATMENT
A	Plane existing carriageway to provide specified depth of surface course & tack coat
B	Apply tack coat, regulating binder course and surface course
C	Apply tack coat, regulating base, binder course and surface course
D	Apply regulating base, base, binder course and surface course