

NOTES

All dimensions in millimetres.

Paving blocks to comply with BS.EN.1338: 2003

Block type, colour, thickness and laying pattern to be as specified.

Stretcher bond and basket weave patterns should not be used in trafficked areas.

Item coverage to include for supply and laying of 30mm. compacted thickness of sand bedding course.


Blocks should be laid touching, hand tight.

Edge and end restraint, and finishing around features, shall be provided as specified, either by purpose made blocks, blocks cut to within stated sizes and tolerances, or of in-situ concrete mix ST4 coloured as adjacent blocks, with surface finish Class U3, of minimum width 100mm and depth equal to the block thickness + sand bed. Where edges are adjacent to kerbing or channelling, machine cut blocks will be permitted.


Blocks shall be thoroughly compacted with a suitable plate vibrator.

Joints between blocks shall be filled with fine dry sand by brushing across the surface and vibrating into the joints.


Sub-base material to be Type 1 unless specified otherwise.

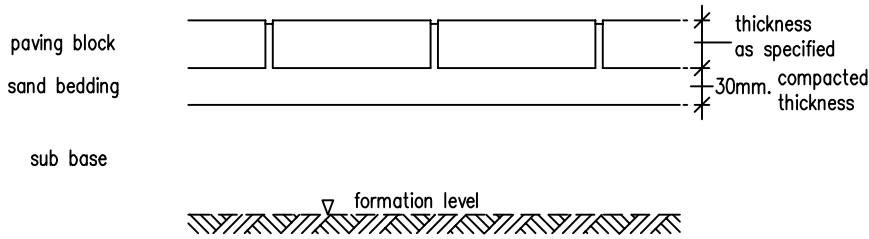


LAYING PATTERNS

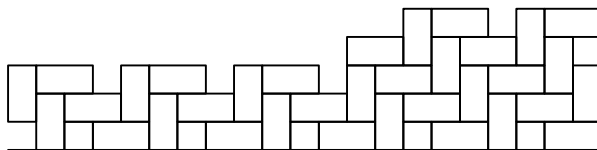


SQUARE HERRINGBONE

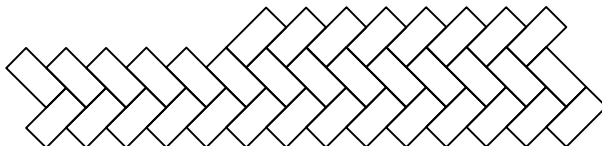

HERRINGBONE

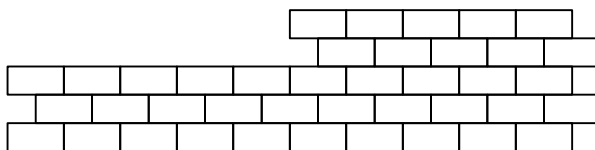

STRETCHER BOND

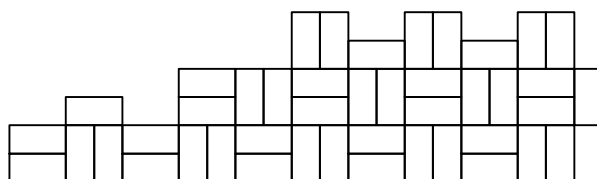

BASKET WEAVE